

CommandPoint™ 72 XR Transmitter

Primex Wireless offers unparalleled power and building penetration with CommandPoint. The CommandPoint Transmitter covers large facilities and campuses often with only one transmitter. The CommandPoint 72XR Transmitter uses the accuracy of GPS technology to provide a completely customizable solution. You will have a system that is tailored to the specific requirements of your facility, saving you time, money, and the headaches of maintaining and integrating the clocks, bells and computer timing devices. Certified installation by a Primex Wireless Installation professional ensures quick, hassle-free implementation.

- 72XR5 5-Watt Transmitter
- 72XR30 30-Watt Transmitter



Command Point 72XR Transmitter



CommandPoint 72XR Specifications:

System

- Operating Frequency Range: 72 MHz
- Enclosure Dimensions: 22"W (55.88cm) x 17"H (43.18cm) x 22"D (55.88cm)
- Approx. Weight:
 - 5W Model 44 lbs. (19.95kg)
 - 30W Model 53 lbs. (24.034kg)
- Power Supply Requirements:
 - 120 VAC, 50/60 Hz
- Oversized heat sink provides adequate cooling
- Amplifier Output Bandwidth: >20 MHz maximum
- Connector at Antenna: N-male

Ground Plane Antenna

- Dimensions: 29.4"H (74.68cm) x 41.5"W (105.41cm)
- Lightning Protection: Direct Ground
- Pole mount

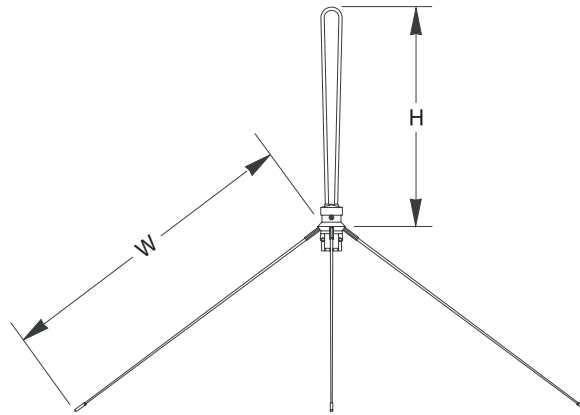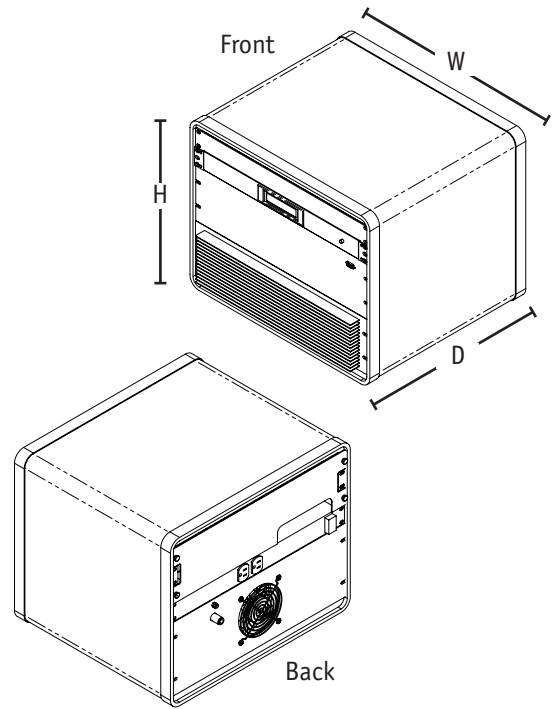

Primex Wireless - Corporate Headquarters
965 Wells Street
Lake Geneva, WI 53147
(800) 537-0464
www.primexwireless.com

Primex Wireless - Canada
1310 Kerrisdale Blvd Unit #4
Newmarket, Ontario L3Y 8V6
(800) 330-1459
www.primexwireless.ca